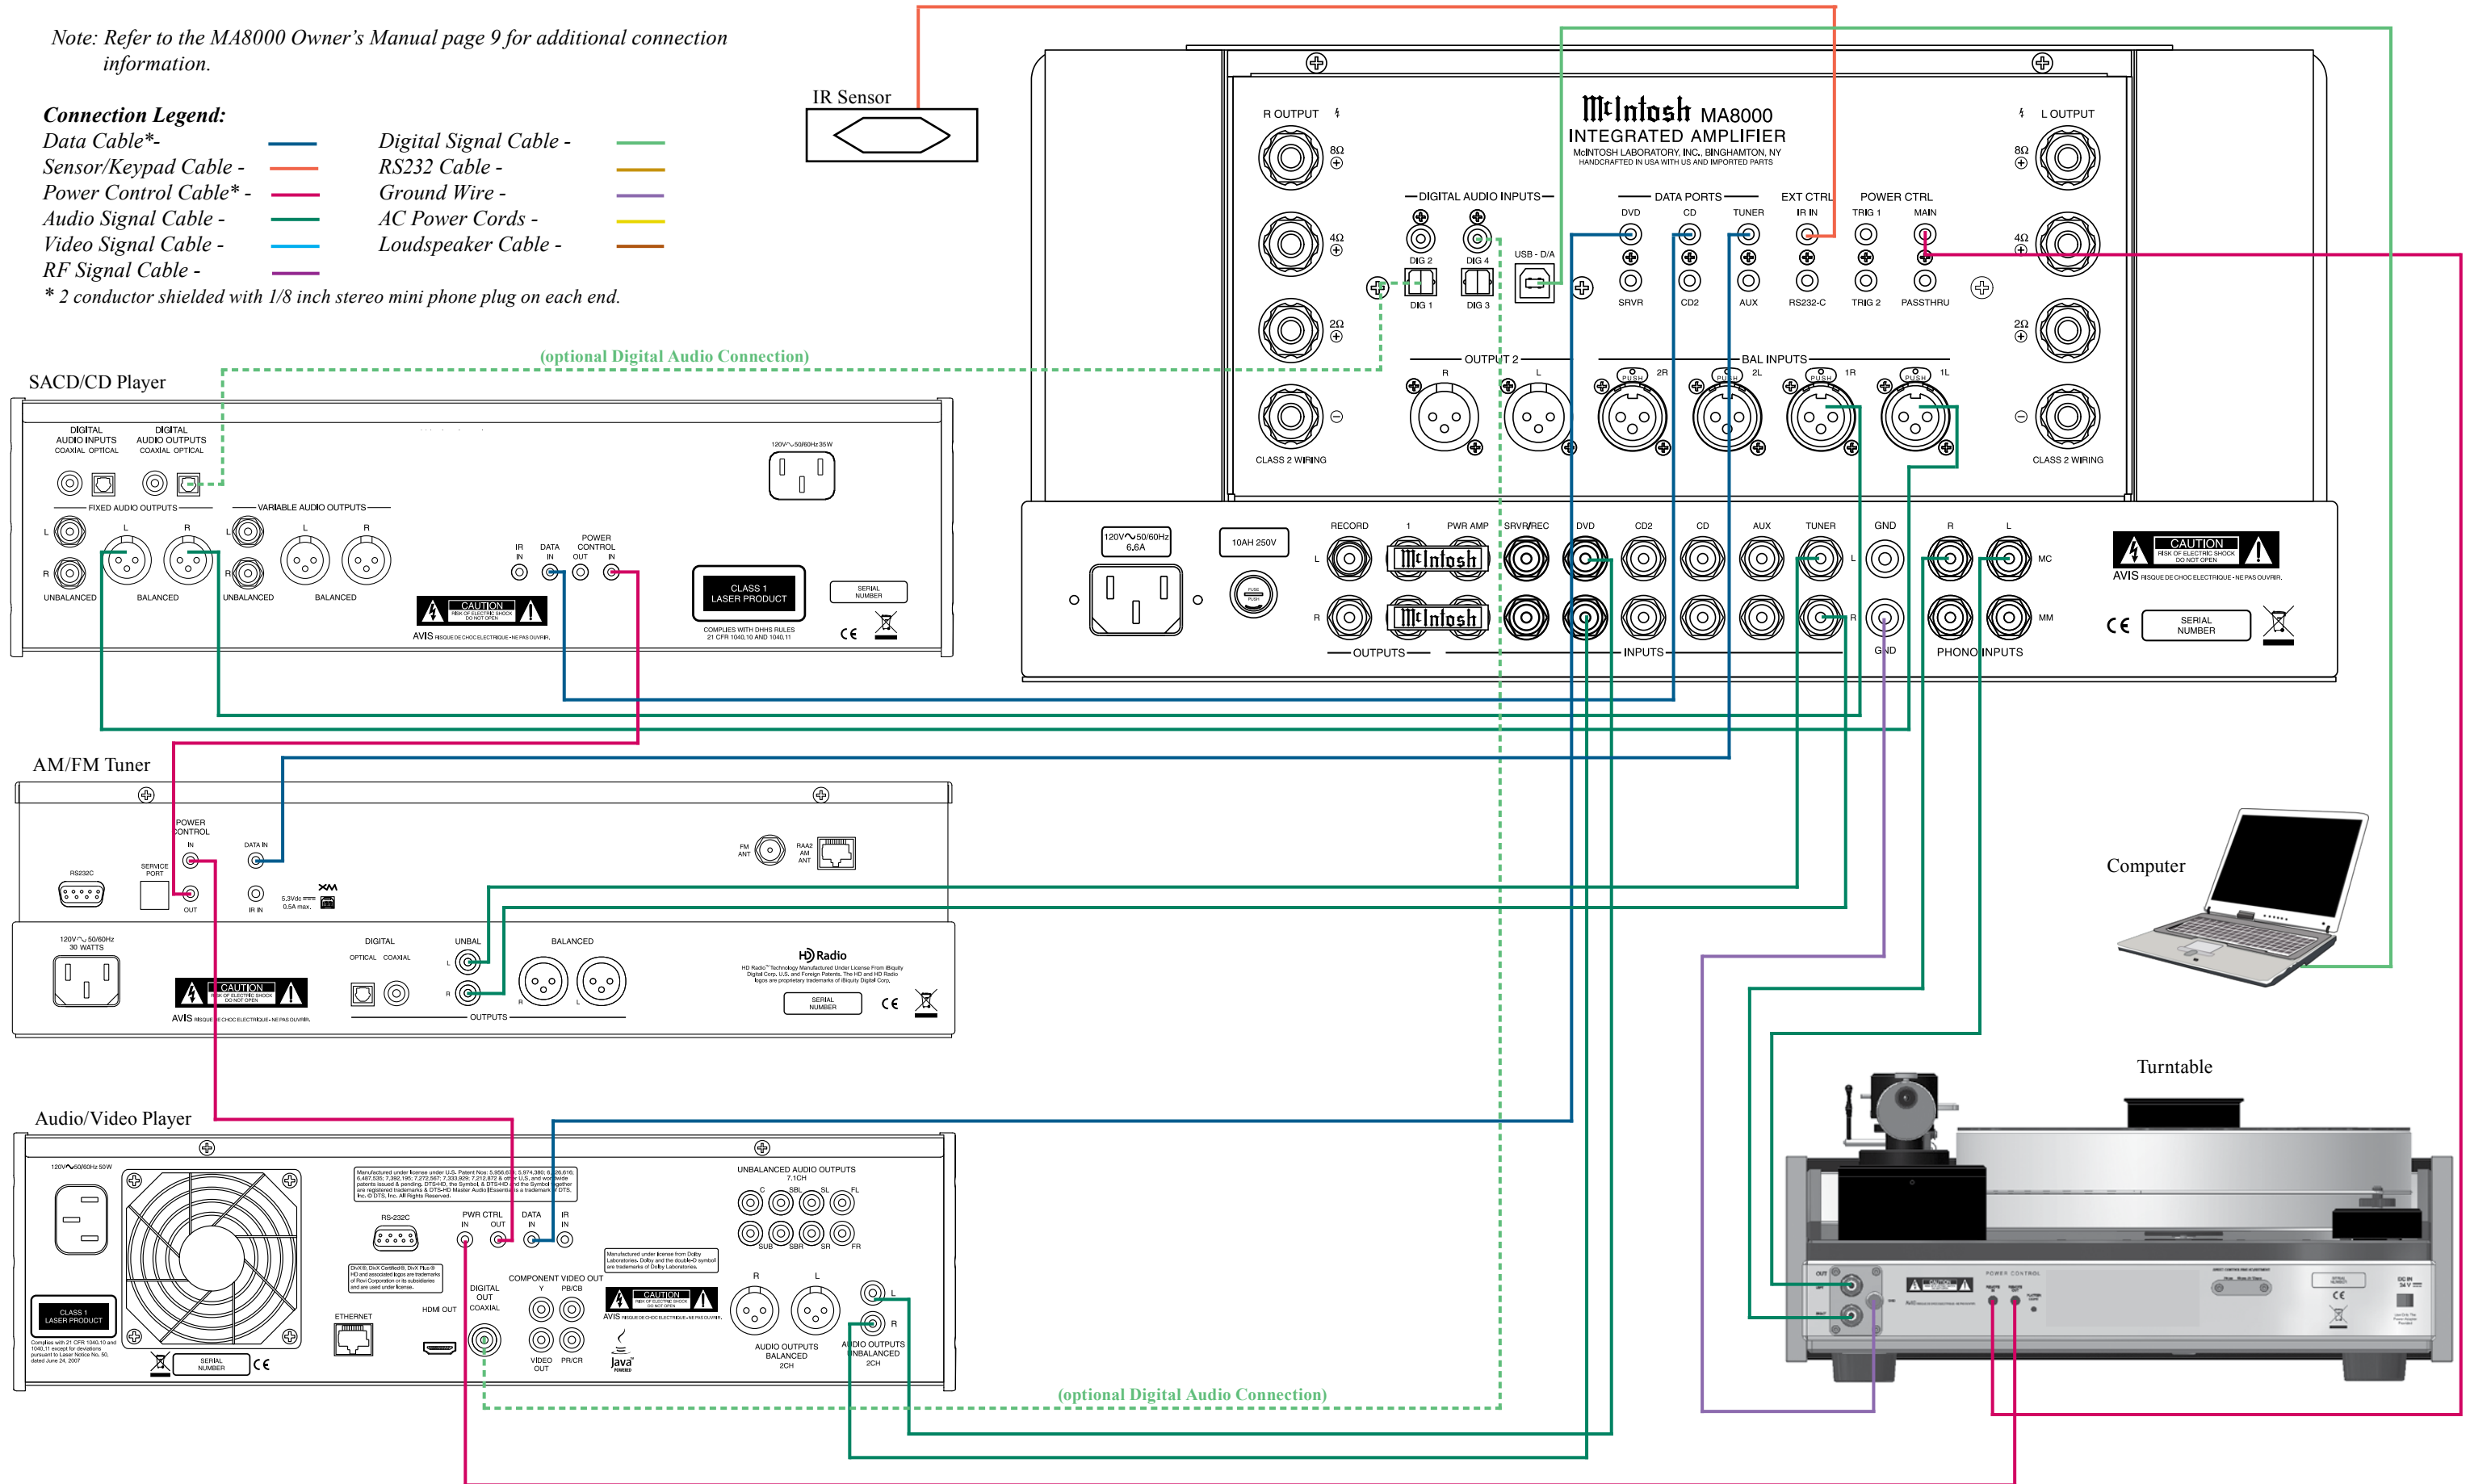Mc2A

Note: Refer to the MA8000 Owner's Manual page 9 for additional connection information.

Connection Legend:

Data Cable*-	Digital Signal Cable -
Sensor/Keypad Cable -	RS232 Cable -
Power Control Cable* -	Ground Wire -
Audio Signal Cable -	AC Power Cords -
Video Signal Cable -	Loudspeaker Cable -
RF Signal Cable -	

* 2 conductor shielded with 1/8 inch stereo mini phone plug on each end.

IR Sensor

McIntosh MA8000
INTEGRATED AMPLIFIER
McINTOSH LABORATORY, INC., BINGHAMTON, NY
HANDCRAFTED IN USA WITH US AND IMPORTED PARTS

R OUTPUT · 8Ω 4Ω 2Ω · L OUTPUT

DIGITAL AUDIO INPUTS — DIG 2 DIG 4 DIG 1 DIG 3 USB - D/A

DATA PORTS — DVD CD TUNER SRVR CD2 AUX

EXT CTRL — IR IN RS232-C

POWER CTRL — TRIG 1 MAIN TRIG 2 PASSTHRU

OUTPUT 2 — R L · CLASS 2 WIRING

BAL INPUTS — 2R 2L 1R 1L · CLASS 2 WIRING

(optional Digital Audio Connection)

SACD/CD Player

DIGITAL AUDIO INPUTS — COAXIAL OPTICAL
DIGITAL AUDIO OUTPUTS — COAXIAL OPTICAL
FIXED AUDIO OUTPUTS — L R UNBALANCED / BALANCED
VARIABLE AUDIO OUTPUTS — L R UNBALANCED / BALANCED
IR IN · DATA IN · POWER CONTROL OUT · IN
120V~50/60Hz 35W
CLASS 1 LASER PRODUCT
COMPLIES WITH DHHS RULES 21 CFR 1040.10 AND 1040.11
SERIAL NUMBER
AVIS RISQUE DE CHOC ELECTRIQUE • NE PAS OUVRIR.

RECORD 1 PWR AMP SRVR/REC DVD CD2 CD AUX TUNER GND R L MC MM
120V~50/60Hz 6,6A · 10AH 250V
McIntosh McIntosh
OUTPUTS — INPUTS — GND PHONO INPUTS
CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN
AVIS RISQUE DE CHOC ELECTRIQUE • NE PAS OUVRIR.
SERIAL NUMBER

AM/FM Tuner

POWER CONTROL IN · DATA IN
RS232C · SERVICE PORT · OUT · IR IN
5.2Vdc 0.5A max. XM
FM ANT · RAA2 AM ANT
120V~50/60Hz 30 WATTS
DIGITAL OPTICAL COAXIAL · UNBAL L R · BALANCED
HD Radio
HD Radio™ Technology Manufactured Under License From iBiquity Digital Corp, U.S. and Foreign Patents. The HD and HD Radio logos are proprietary trademarks of iBiquity Digital Corp.
OUTPUTS
AVIS RISQUE DE CHOC ELECTRIQUE • NE PAS OUVRIR.
SERIAL NUMBER

Computer

Turntable

Audio/Video Player

120V~50/60Hz 50W
RS-232C · PWR CTRL IN OUT · DATA IN · IR IN
UNBALANCED AUDIO OUTPUTS 7.1CH
C SBL SL FL / SUB SBR SR FR
COMPONENT VIDEO OUT Y PB/CB PR/CR
DIGITAL OUT COAXIAL · VIDEO OUT
AUDIO OUTPUTS BALANCED 2CH · L R
AUDIO OUTPUTS UNBALANCED 2CH · L R
ETHERNET · HDMI OUT
Java POWERED
CLASS 1 LASER PRODUCT
CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN
AVIS RISQUE DE CHOC ELECTRIQUE • NE PAS OUVRIR.
SERIAL NUMBER

OUT · POWER CONTROL · DC 9V 34 V

(optional Digital Audio Connection)

Note: Refer to the MA8000 Owner's Manual pages 9 and 10 for additional connection information.

Connection Legend:

Data Cable* -		*Digital Signal Cable* -	
Sensor/Keypad Cable -		*RS232 Cable* -	
Power Control Cable* -		*Ground Wire* -	
Audio Signal Cable -		*AC Power Cords* -	
Video Signal Cable -		*Loudspeaker Cable* -	
RF Signal Cable -			

* 2 conductor shielded with 1/8 inch stereo mini phone plug on each end.

Power Amplifier - Secondary Room

Right Loudspeaker - Secondary Room

Left Loudspeaker - Secondary Room

Connect to AC Outlet

Right Loudspeaker

Left Loudspeaker

McIntosh MA8000
INTEGRATED AMPLIFIER
McINTOSH LABORATORY, INC., BINGHAMTON, NY
HANDCRAFTED IN USA WITH US AND IMPORTED PARTS

Connect to AC Outlet